REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	KUNG	2016/10/19	
B				
C				

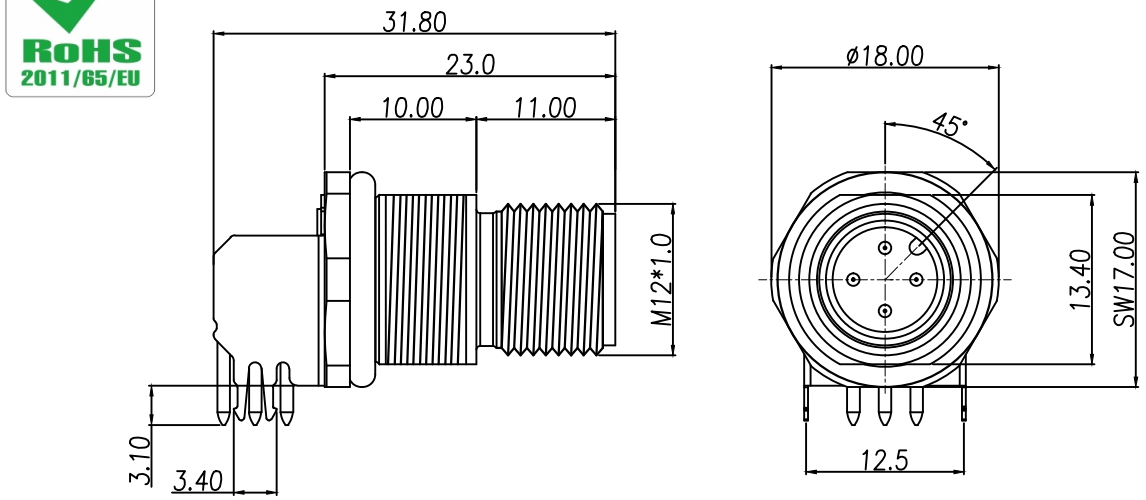

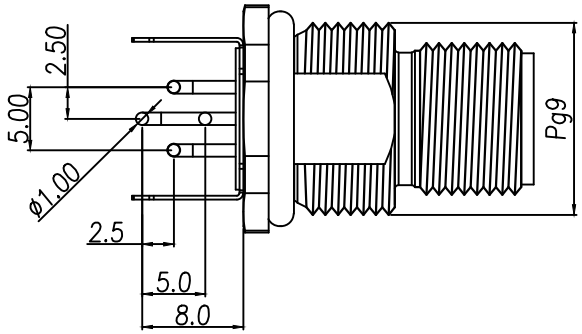

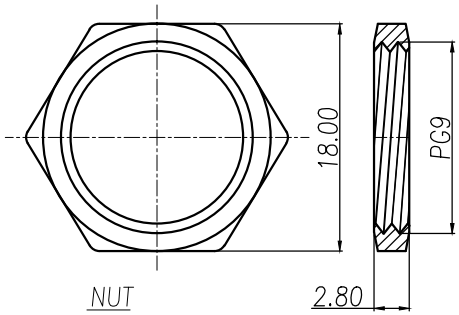

NUT



RECOMMENDPANEL CUT-OUT



RECOMMEND P.C.B LAYOUT

1. MATERIAL :
   1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : BRASS.
   1-3. NUT : BRASS.
   1-4. SHELL : BRASS.
   1-5. O-RING : EPDM
   1-6. GROUND : PHOSPHOR BRONZE
2. FINISH :
   2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
   UNDER PLATE : NICKEL
   2-2. NUT : NICKEL PLATED
   2-3. SHELL : NICKEL PLATED
   2-4. GROUND : BIRGHT TIN PLATED
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 4A
   3-2. Rated Voltage : 250V
   3-3. Water proof: IP68 When Un-mated
4. Environmental :
   4-1. Operation Temperature : -40℃~85℃

DRAW	KU	APPVL	KUNG	UNIT	mm	TOLERANCE .x ±0.10 .xx ±0.05 .xxx ±0.03 .xxxx ±0.01 ANGULA ±1°	JKL TECHNOLOGY CO., LTD.	TITLE	M12 A-CODE 4P (M) FRONT PANEL MOUNT 90°, DIP TYPE.	SHEET
CHECK				SCALE	1:1			PART NO.	WP-04M2-107-11	DWG NO. QC7311	VERSION A