




\* SUBJECT TO CHANGE WITHOUT NOTICE

REV.	DESCRIPTION	APPL. BY	DATE	ECN NO.
A	RELEASE	KUNG	22/12/08*	
B				
C				

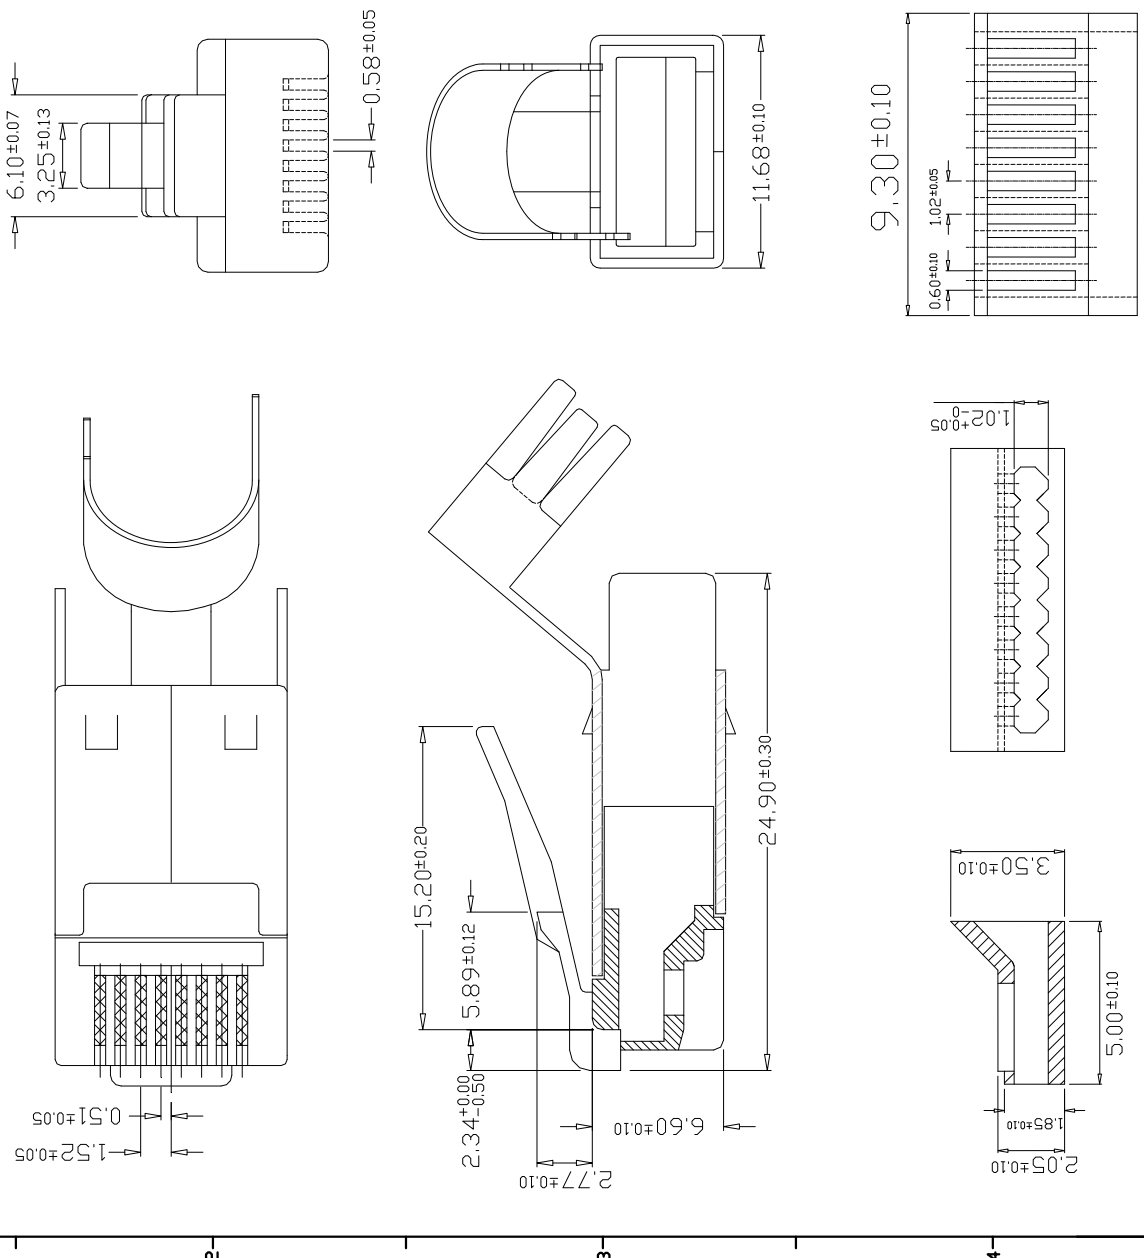

### 2 PRONGS FOR STRANDED WIRE

### MATERIAL & FINISH

Housing: PC, UL94V-2, transparent Red.  
 Contact: Phosphor Bronze  
 Gold plated: 50 μ"

### SPECIFICATION

Voltage Rating: 125 volts AC, at 1.5 amps.  
 Dielectric Withstanding Voltage: 1000 volts AC.  
 Insulation Resistance: 500 megohms. min.  
 Termination Resistance: 30 milliohms max  
 Durability: 750 cycles.  
 Temperature: -40°C to +80°C  
 Available for 24 or 26 AWG wire.

DRAW	HULK	APPL	JKL TECHNOLOGY CO., LTD.		TITLE	RJ45 PLUG , 2 PRONGS, 50u" (HEROSE TYPE)	SHEET
CHECK					PART NO.	PK-7860-88-RD	VERSION
					DWG NO.	TC6LH5A-2SE	A

TOLERANCE	±0.20
x	±0.10
xx	±0.05
xxx	±0.03
xxxx	±0.03
ANGULA	±1°

UNIT	MM
SCALE	1:1

KUNG