REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	kung	2016/08/31	
B				
C				

RoHS 2011/65/EU

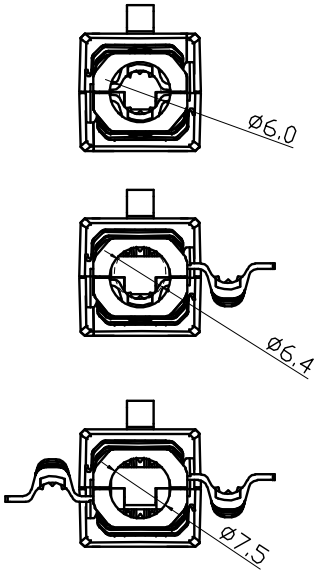

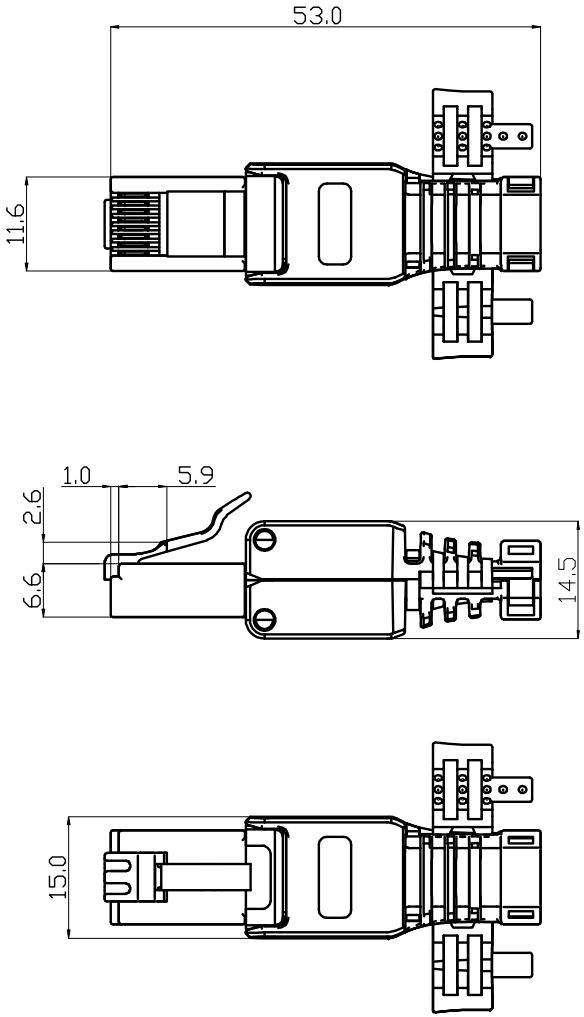

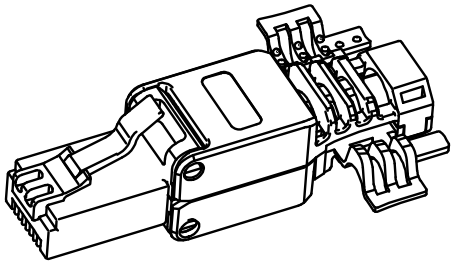



TYPE:
1. CAT6A UNSHIELDED TOOLLESS PLUG
2. COLOUR: WHITE

CABLE MATCHED:
1. SOILD AND STRANDED
2. 22AWG/23AWG/24AWG

ELECTRICAL:
1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: <= 500M OHM @100 V DC
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60HZ, IMIN
4. CAT6A PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:
1. STORAGE: -40°/ +70°
2. OPERATION: -10°/ +60°

MECHANICAL:
1. PLASTIC MATERIAL: NEW PC
2. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
3. TERMINAL PINS: PHOSPHOR BRONZE, ZIN PLATING
4. RJ45 CONTACT LIFE: 750 TIMES MIN
5. IDC TERMINAL LIFE: 250 TIMES MIN

DRAWN		APP'D		UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.15 .xxx ±0.10 .xxxx ±0.05 ANGULA ±1°	JKL TECHNOLOGY CO., LTD.	TITLE	CAT.6A UTP TOOLEET PLUG ,ASS"Y TYPE , WHITE		SHEET 1/1
CHK'D				SCALE	1:1			PART NO.	RJU06A-88-WH	DWG NO. RJU06A-688Y	VERSION A