


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A			08/14/09	
B				
C				

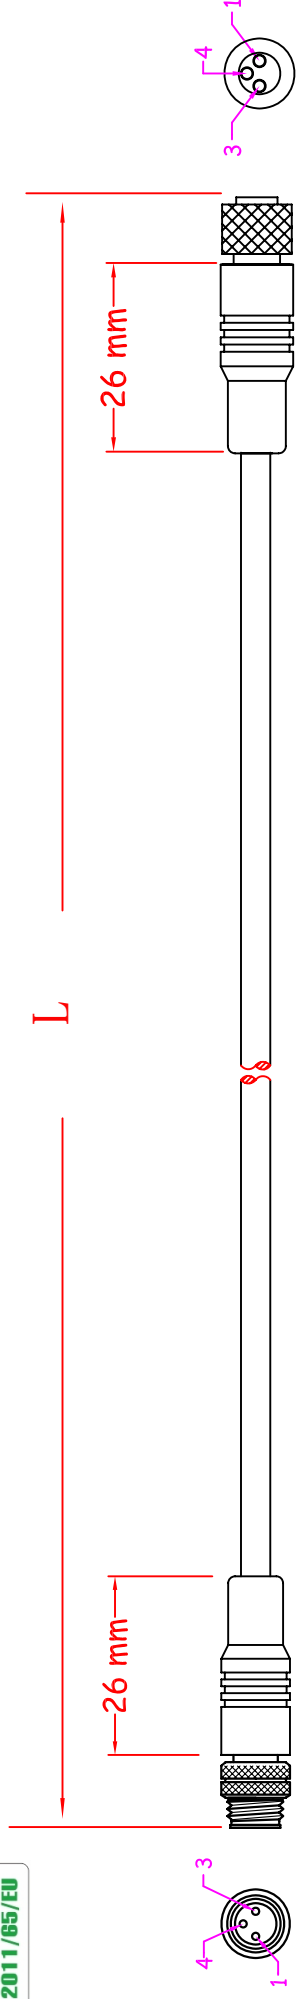

P1
M8 3PIN, MALE

P2
M8 3 PIN, FEMALE

TECHNICAL DATA

* OPERATING TEMPERATURE : -25°C ~ +85°C

MATERIALS

- * CABLE : 0.20mm² (24AWG) x 3C, PVC, BLACK.
- * HOUSING/MOLDED BODY : PVC, BLACK.
- * INSERT : PBT, UL94V-0, BLACK.
- * CONTACT : CuZn, PRE-NICKELED & 10u" GOLD PLATED.
- * NUT : CuZn, NICKEL-PLATED.
- * FEMALE WITH O-RING : NBR, BLACK.


MECHANICAL DATA

* DEGREE OF PROTECTDN : P67

ELECTRICAL DATA

- * CONTACT RESISTANCE : <1Ω
- * RATED CURRENT : 4A
- * RATED VOLTAGE : 250V
- * TEST VOLTAGE : 1000V
- * INSULATION RESISTANCE : >10mΩ

WIRING DIAGRAM

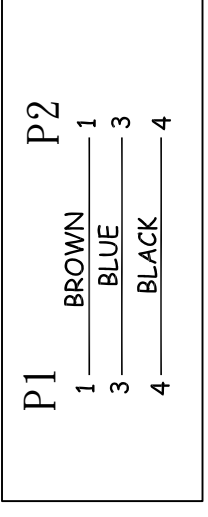

DRAWN	NEIL	APP'D	KUNG	UNIT	mm	TOLERANCE	±0.20	SHEET	1
CHK'D	TIM			SCALE	1:1	±0.10		TITLE	M8 3 PIN MALE/FEMALE CABLE ASS'Y
						±0.05		PART NO.	WP-03M F-0303-M-BK DWG.
						±0.03			
						ANGULAR ±1°			VERSION
									A

JKL TECHNOLOGY CO., LTD.

