

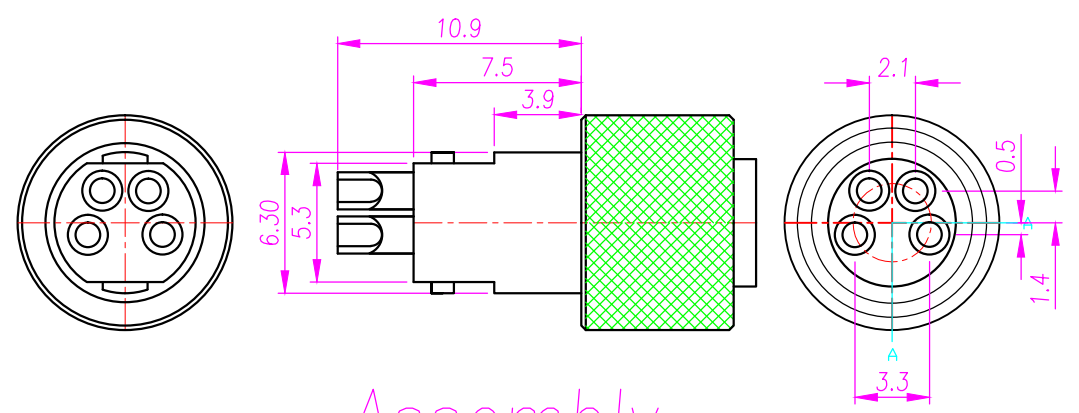


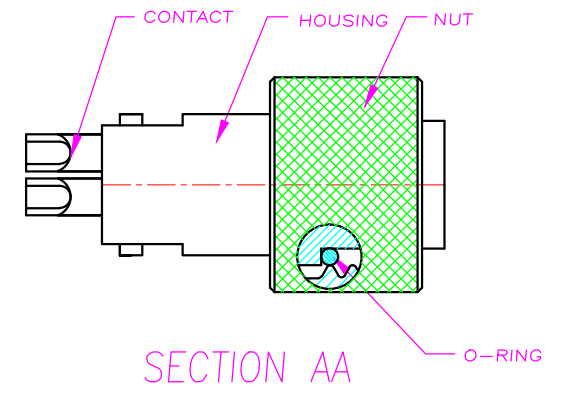

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	Change DIM.	KU	08/12/08*	ECN08011
B	Change BDM	KU	02/03/09*	
C				

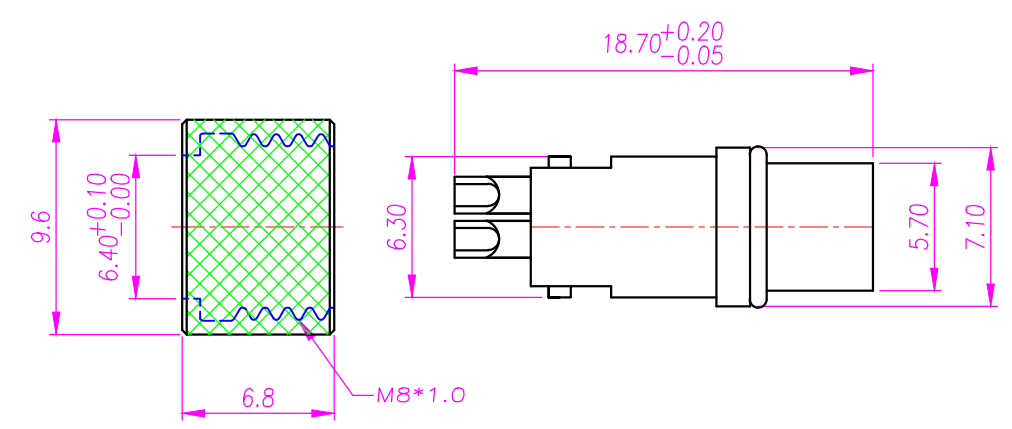

Assembly

- NOTE:
- MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRONZE
 - 1-3. O-RING : NBR ; COLOR : BLACK
 - 1-4. NUT : BRASS
 - FINISH :
 - 2-1. CONTACT :
 - CONTACT AREA : 10 MICRO INCHES MIN. GOLD PLATING
 - SOLDER AREA : Gold Flash
 - UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
 - ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Voltage : 125V
 - 3-3. Water proof: IPX7
 - Environmental :
 - 4-1. Operation Temperature : -40 °C~85°C

DRAWN	Ku Chou	APP'D	KUNG	UNIT	mm	TOLERANCE		JKL TECHNOLOGY CO., LTD.	TITLE	M8 4 PIN FEMALE WATERPROOF CONNECTOR FOR CABLE			SHEET	1
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	WP-04F2-16	DWG NO.	QC3146	VERSION	B