

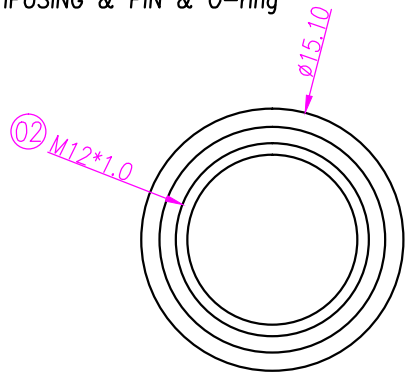
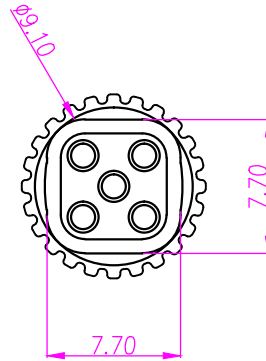
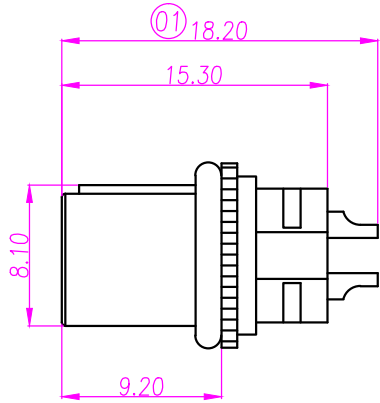




HPUSING & PIN & O-ring



NUT & anti-vibration detent

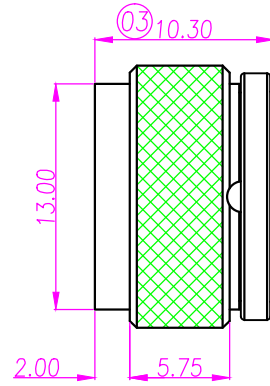

SHELL

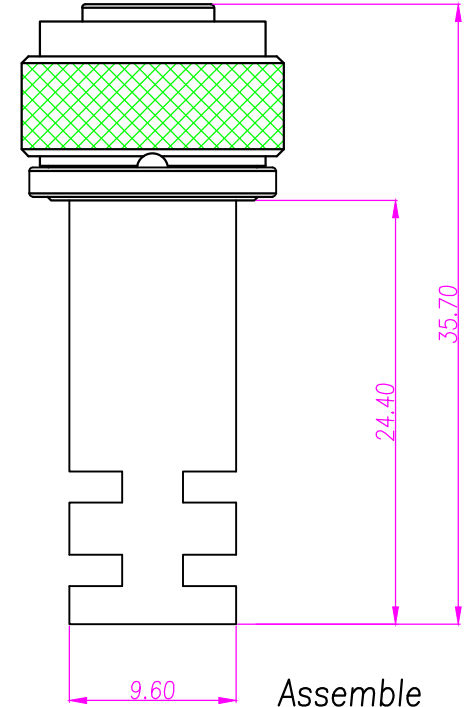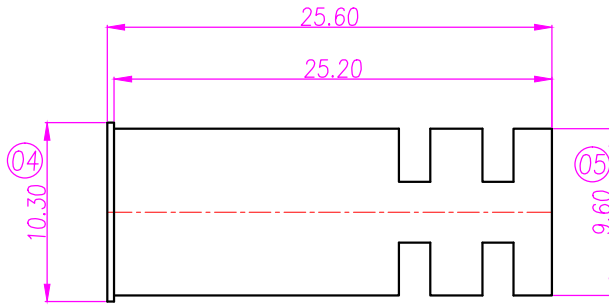

Assemble

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	kung	25/02/14*	
B				
C				

- MATERIAL :
 - 1-1. HOUSING : PA66 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM ; Color : BLACK.
- FINISH :
 - 2-1. CONTACT : GOLD PLATED
 - UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED.
 - 2-3. SHELL : NICKEL PLATED.
- ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Rated Voltage : 125V
 - 3-3. Water proof : IPX7
- Environmental :
 - 4-1. Operation Temperature : -20℃~85℃

DRAW	Ku Chou	APPVL	KUNG	UNIT	mm	TOLERANCE		JKL TECHNOLOGY CO., LTD.	TITLE	M12 5PIN FEMALE WATERPROOF CONNECTOR FOR CABLE ,B-CODE			SHEET
CHECK	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			PART NO.	WP-05F2-88-11	DWG NO.	QC6594	VERSION