REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	06/07/18'	
B				
C				

RoHS 2011/65/EU

* SUBJECT TO CHANGE WITHOUT NOTICE

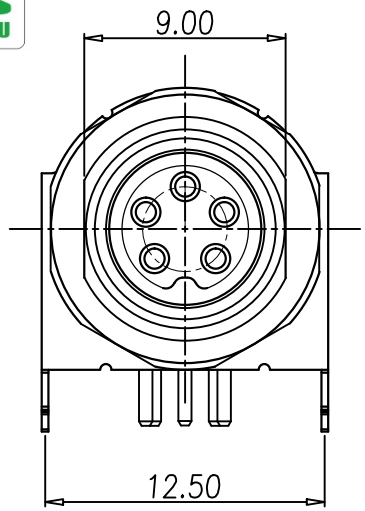

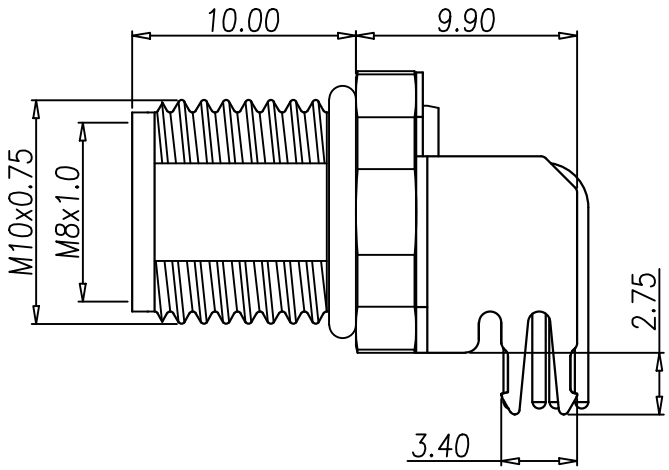

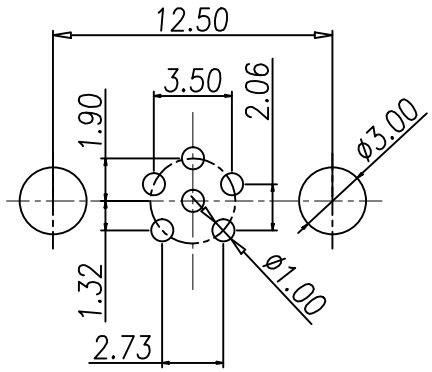

P.C.B LAYOUT

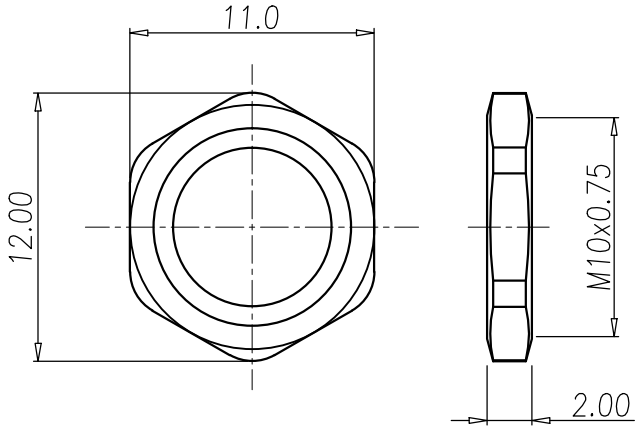

NUT

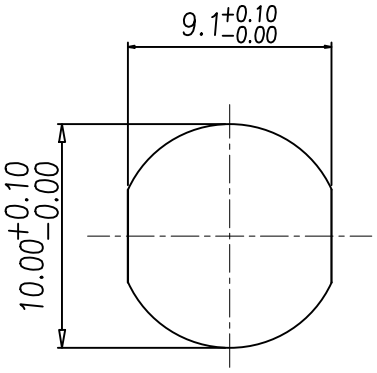

RECOMMENDPANEL CUT-OUT

1. MATERIAL :
   - ⚠1-1. HOUSING : PA66 UL94V-0 ; COLOR : BLACK
   - 1-2. CONTACT : BRASS.
   - 1-3. NUT : BRASS.
   - 1-4. SHELL : BRASS.
   - 1-5. O-RING : NBR
   - 1-6. GROUND : PHOSPHOR BRONZE
2. FINISH :
   - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
     UNDER PLATE : NICKEL
   - 2-2. NUT : NICKEL PLATED
   - 2-3. SHELL : NICKEL PLATED
   - 2-4. GROUND : BIRGHT TIN PLATED
3. ELECTRICAL SPECIFICATION :
   - 3-1. Rated current : 2A
   - 3-2. Rated voltage : 30V
   - 3-3. Water proof : IP67
4. Environmental :
   - 4-1. Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APPEND	KUNG	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	JKL TECHNOLOGY CO., LTD.	TITLE	M8 5P (F) FRONT PANEL MOUNT RIGHT ANGLE DIP TYPE.	SHEET 1/2
CHOKED	Emily Suen			SCALE	1:1			PART NO.	WP-05F3-02-11 DWG NO. QC8010	VERSION A