
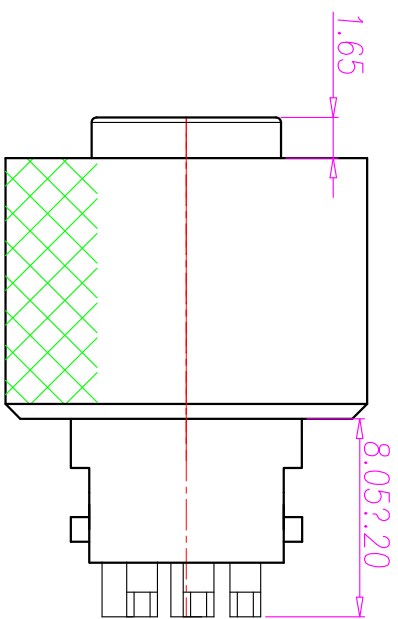
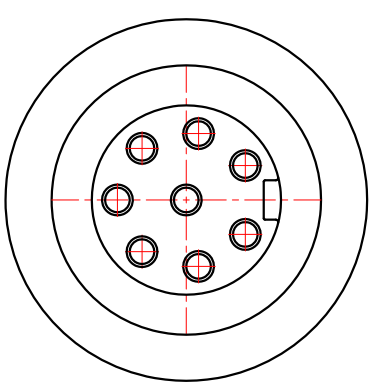
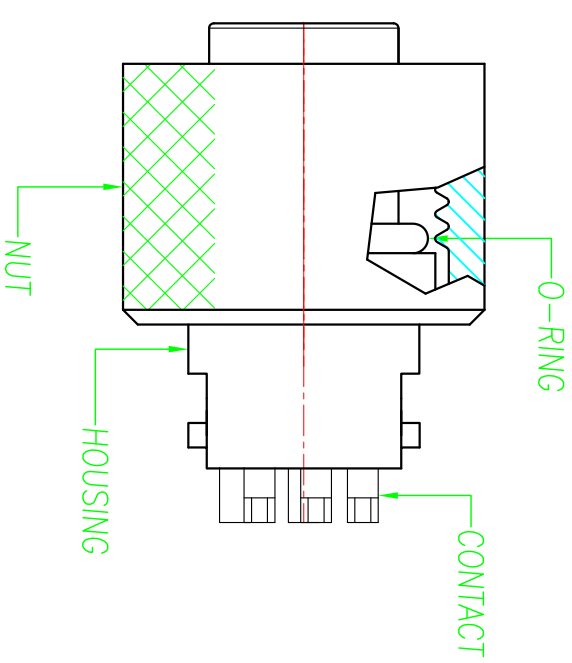
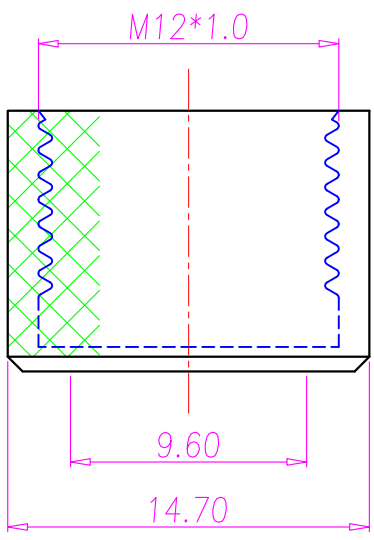


CUSTOMER DRAWING

| REV. | DESCRIPTION | APPROVED BY | DATE | ECN N.D. |
|------|-------------|-------------|-----------|----------|
| A | RELEASE | Fido Veng | 27/02/09* | |
| B | | | | |
| C | | | | |

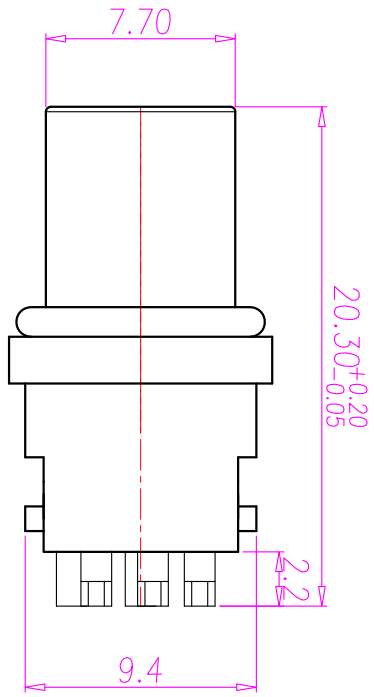

Assembly

1. MATERIAL :
 - 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. O-RING :EPDM; COLOR : BLACK
2. FINISH :
 - 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED UNDER PLATE : NICKEL
 - 2-2. NUT : NICKEL PLATED 60u" ~ 100u" OVER ALL
3. ELECTRICAL SPECIFICATION :
 - 3-1. Rated current : 5A
 - 3-2. Voltage :125V
 - 3-3. Water proof: IPX7
4. Environmental :
 - 4-1. Operation Temperature : -20°C~85°C

| | | | | | | | | | | | |
|---------|------|--------|-------|-----|---|--|--------------------------|----------|-------------------|---------|--|
| DRAWN | HULK | APPEND | UNIT | mm | TOLERANCE | | JKL TECHNOLOGY CO., LTD. | TITLE | 防水環 8pin +M12牙環成品 | SHEET | |
| CHECKED | | | SCALE | 1:1 | ±0.20 ±0.10 ±0.05 ±0.03 ±1° | | | PART NO. | WP-08F2-02 | DWG NO. | |