




\* SUBJECT TO CHANGE WITHOUT NOTICE

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	08/05/19	
B				
C				

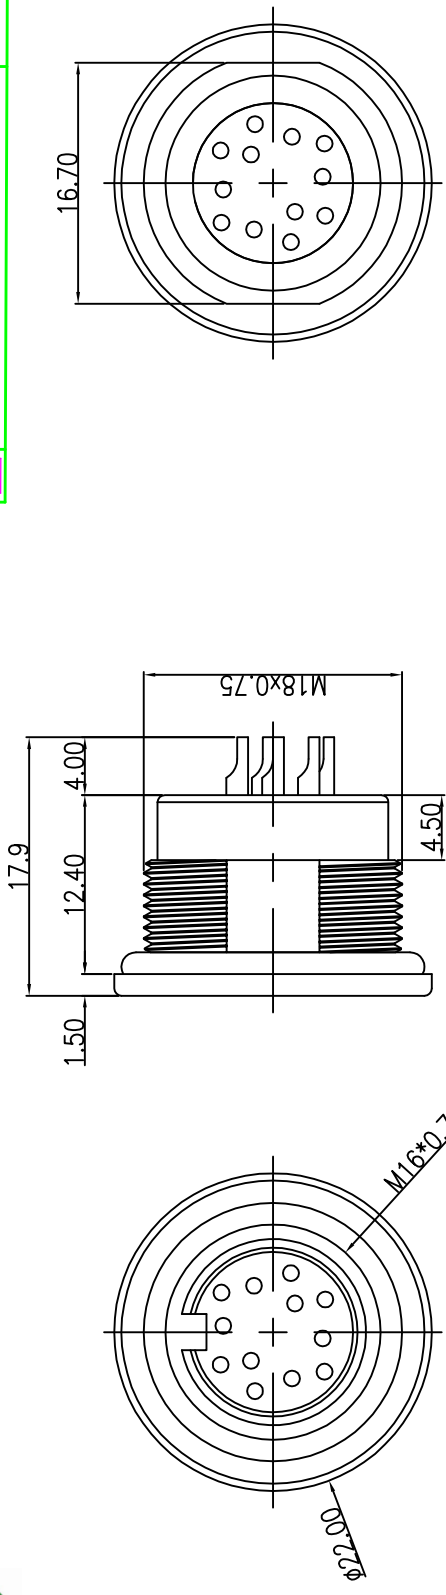

- MATERIAL :
  - HOUSING : PA66 ; COLOR : BLACK.
  - CONTACT : BRASS
  - NUT : BRASS
  - O-RING : EPDM ; COLOR : BLACK
  - SHELL : BRASS.
- FINISH :
  - CONTACT : GOLD FLASH MICRO INCHES MIN. UNDER PLATE ; NICKEL
  - NUT : NICKEL PLATED
  - SHELL : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
  - Rated current : 3PIN~8PIN 5A ; 12PIN~14PIN 3A
  - Rated Voltage : 3PIN~8PIN 250V ; 12PIN~14PIN 60V
  - Water proof : IPX8
- Environmental :
  - Operation Temperature : -40℃~85℃

RECOMMEND PANEL CUT-OUT

DI-03F2-16-11	DI-04F2-22-11	DI-05F2-19-11	DI-06F2-27-11	DI-07F2-19-11	DI-07F2-20-11	DI-07F2-19-11	DI-07F2-20-11	DI-08F2-17-11	DI-12F2-16-11	DI-14F2-02-11

DRAWN CHOKED	KU	APPEND	KUNG	UNIT SCALE 1:1	TOLERANCE x ±0.20 xx ±0.10 xxx ±0.05 xxxx ±0.03 ANGULA ±1°			TITLE	DIN M16 (F) REAR PANEL MOUNT , SOLDER TYPE.	SHEET	⊕
								PART NO.	DI-07F2-20-11	DWG NO.	QC9400

JKL TECHNOLOGY CO., LTD.