REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	25/02/14'	
B				
C				

RoHS 2011/65/EU

* SUBJECT TO CHANGE WITHOUT NOTICE

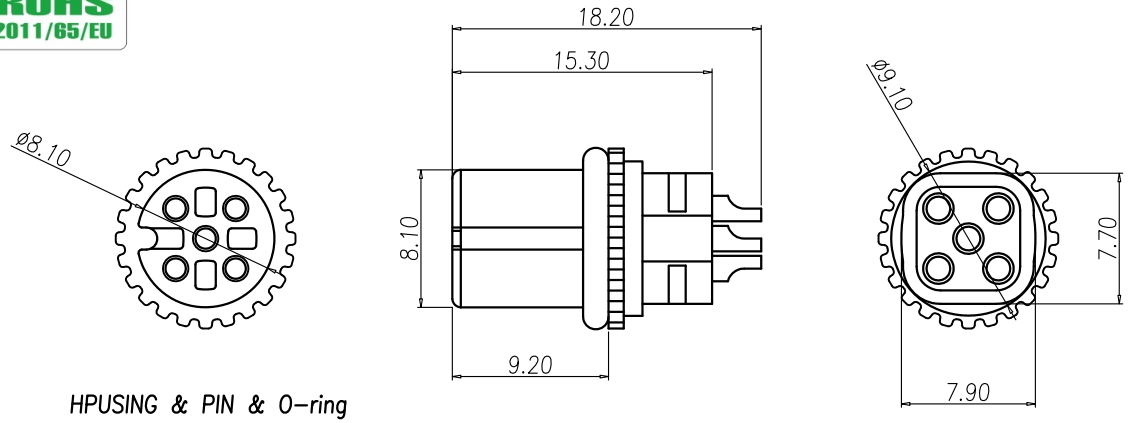

HPUSING & PIN & O-ring

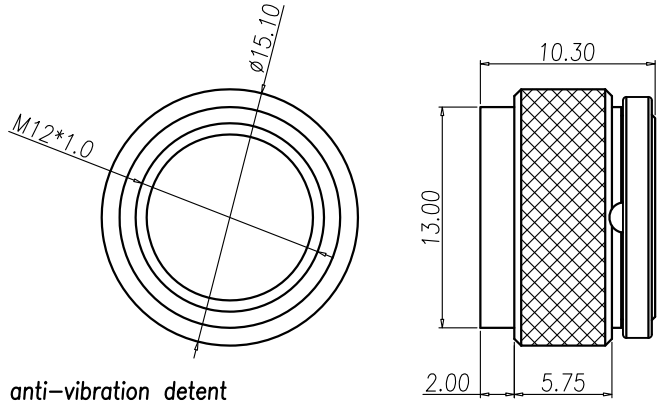

NUT & anti-vibration detent

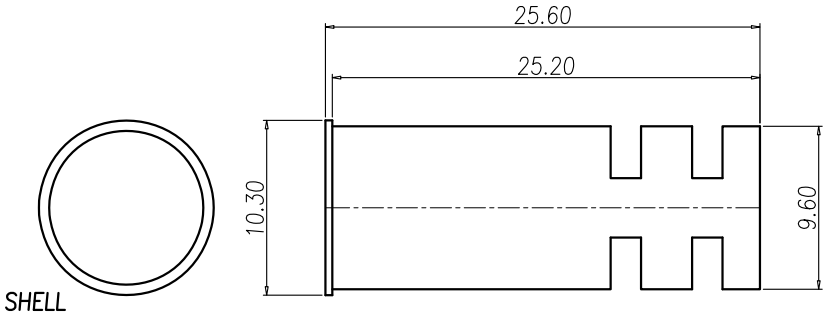

SHELL

TABLE A

5P	4P
WP-05F2-209-11 WP-05F2-210-11	WP-04F2-276-11 WP-04F2-277-11
3P	**2P**
WP-03F2-166-11 WP-03F2-167-11	WP-02F2-97-11 WP-02F2-98-11

WP-02F2-97-11	GOLD FLASH	WP-02F2-98-11	GOLD 10u"
WP-03F2-166-11	GOLD FLASH	WP-03F2-167-11	GOLD 10u"
WP-04F2-276-11	GOLD FLASH	WP-04F2-277-11	GOLD 10u"
WP-05F2-209-11	GOLD FLASH	WP-05F2-210-11	GOLD 10u"
PART NO	FINISH	PART NO	FINISH

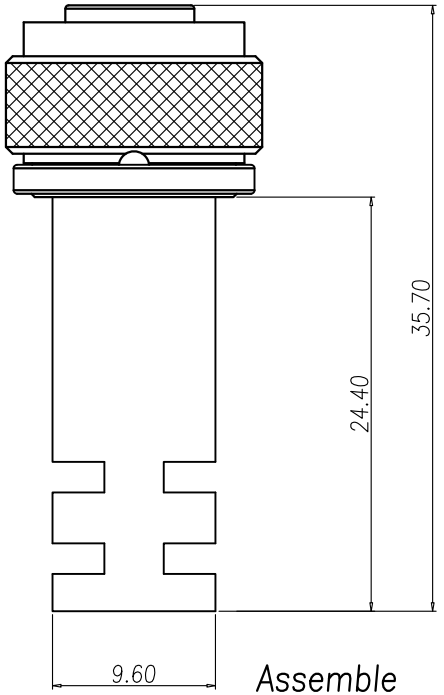

Assemble

1. MATERIAL :
   1-1. HOUSING : PA66 ; COLOR : BLACK
   1-2. CONTACT : BRASS
   1-3. NUT : BRASS
   1-4. SHELL : BRASS
   1-5. O-RING : EPDM
2. FINISH :
   2-1. CONTACT : SEE TABLE A
   UNDER PLATE : NICKEL
   2-2. NUT : NICKEL PLATED.
   2-3. SHELL : NICKEL PLATED.
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 4A
   3-2. Rated Voltage : 2~4PIN 250V ; 5PIN 60V
   3-3. Water proof : IPX7
4. Environmental :
   4-1. Operation Temperature : -40℃~85℃

DRAWN	Ku Chou	APP'D	KUNG	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		JKL TECHNOLOGY CO., LTD.	TITLE	M12 4P (F) A-CODE ANTI-SLIP GROUNDING SOLDER TYPE.	SHEET 1/1
CHK'D	Emily Suen			SCALE	1:1				PART NO.	WP-04F2-277-11	DWG. QC10166	VERSION A