

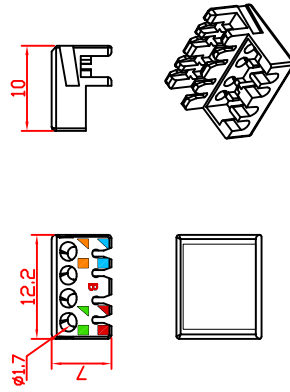
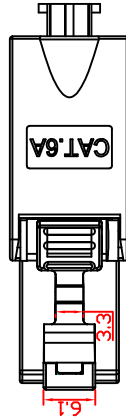

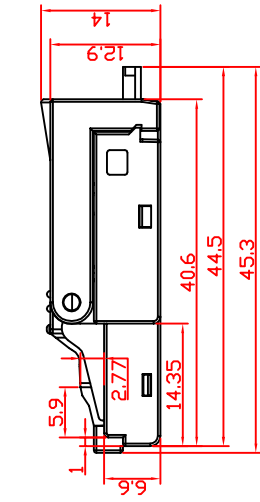
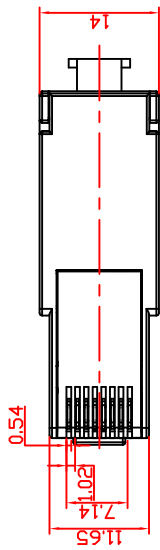
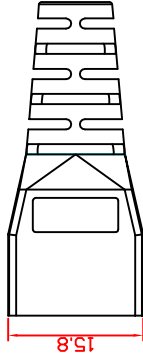


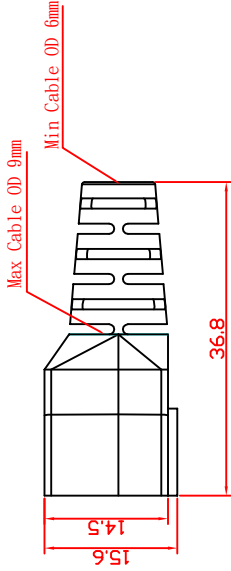

* SUBJECT TO CHANGE WITHOUT NOTICE

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	09/05/19*	
B				
C				



NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 20MΩ MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40 ° TO +85 °
2. OPERATION: 0 ° TO 70 °

MECHANICAL:

1. HOUSING MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC
3. PCB MATERIAL: FR-4 T=1.6mm
4. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.30mm
5. IDC LIFE: 200 TIMES MIN
6. WIRE: AWG 22-26

DRAWN	Ku Chou	APP'D	KUNG	UNIT	MM	TOLERANCE	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGLE ±1°		JKL TECHNOLOGY CO., LTD.		TITLE	CAT.6A SHIELDED PLUG TOOLEST TYPE , WITH BOOT.	SHEET	⊕
	CHK'D								Enly Suen	PART NO.	RJ-S06A-88-BT	DWG NO.	KJ-AP054-S6A	VERSION