REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	2019.12.11	
B				
C				

RoHS COMPLIANT

* SUBJECT TO CHANGE WITHOUT NOTICE

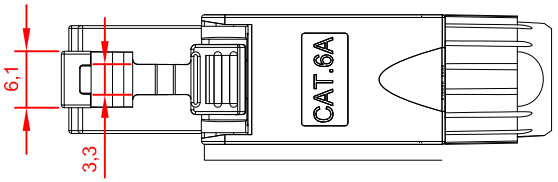

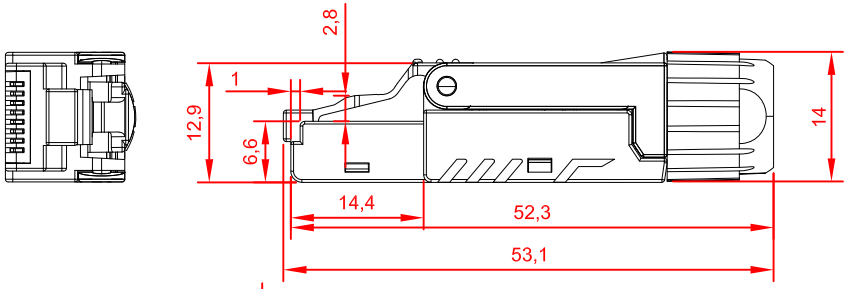



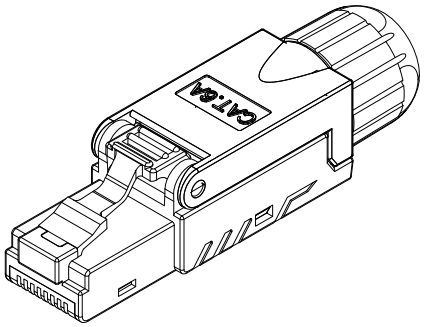











NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:20MΩ MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. PCB MATERIAL:FR-4 T=1.6mm
3. CONTACT MATERIAL:PHOSPHOR BRONZE
   STAMP PIN 0.30mm
4. IDC LIFE:200 TIMES MIN
5. WIRE:AWG 23-26
6. Nut material:Plastic

DRAWN	Ku Chou	APP'D	KUNG	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		JKL TECHNOLOGY CO., LTD.	TITLE	CAT6A SHIELDED PLUG, TOOLEST TYPE.	SHEET 1/1
CHK'D	Emily Suen			SCALE	1:1				PART NO.	RJ-S06A-88--ST	DWG NO. KJ-AP055B-S6A	VERSION A