




REV. DESCRIPTION APPROVED BY DATE ECN NO.

A RELEASE KUNG 2019.12.11

B

C

* SUBJECT TO CHANGE WITHOUT NOTICE

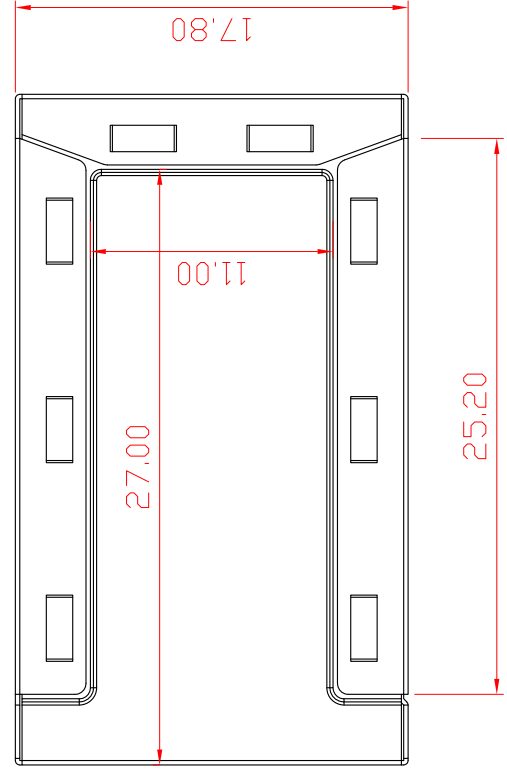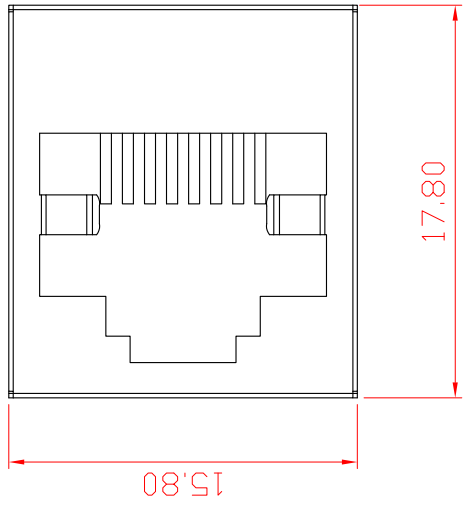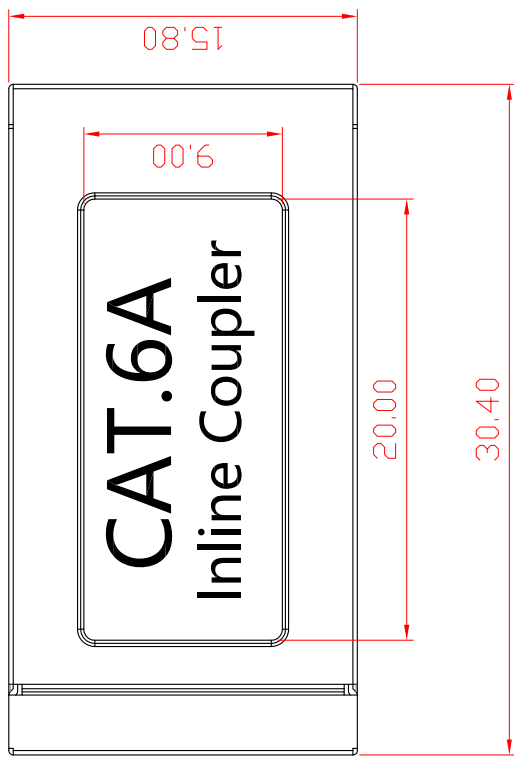

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 20MΩ MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: 0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL: ABS
2. PCB MATERIAL: FR-4 T=1.0mm
3. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN T=0.30mm
4. RJ45 JACK ; IFE: 750 TIMES MIN
5. SHIELD MATERIAL: STAINLESS STEEL,
T=0.2mm

DRAWN	Ku Chou	APP'D	KUNG	UNIT	MM	TOLERANCE	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGLA ±1°	 	JKL TECHNOLOGY CO., LTD.		TITLE	CAT6A SHIELDED INLINE COUPLER.	SHEET	⊕
	CHK'D								Enly Suen	PART NO.	RJ-S06A-8F8F	DWG NO.	SB42-S-CAT.6A	VERSION