



REV.	DESCRIPTION	APPL. BY	DATE	ECN NO.
A	RELEASE	KUNG	2016.05.24	
B				
C				

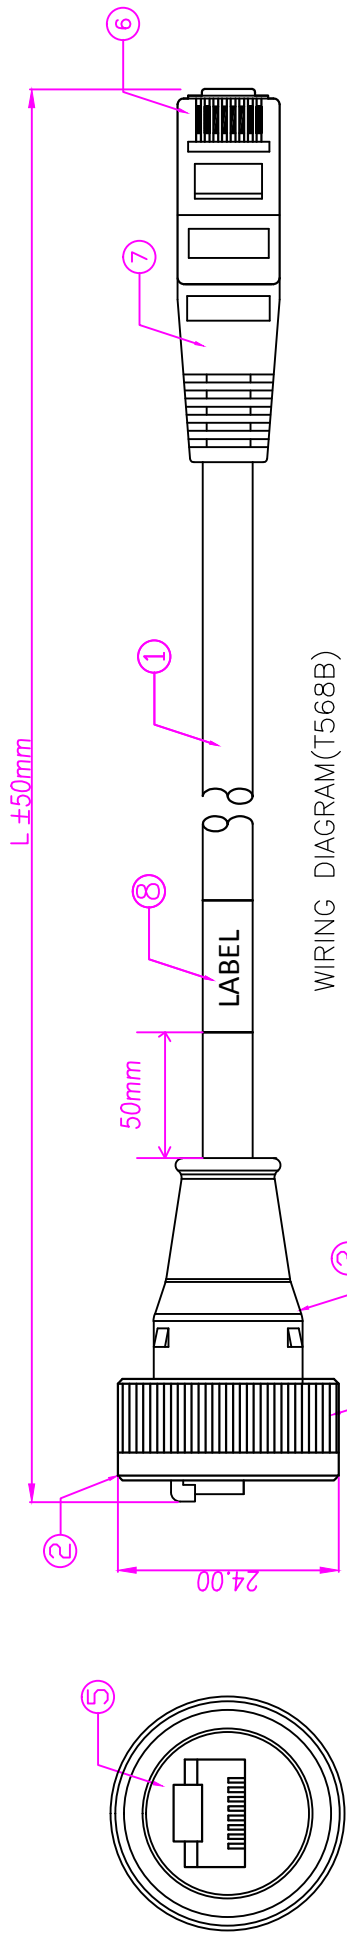

CDN 1


PIN FRONT VIEW

WIRING DIAGRAM(T568B)

P1	WIRE COLOR	P2
1	WH/OR	1
2	ORANGE	2
3	WH/GR	3
6	GREEN	6
4	BLUE	4
5	WH/BL	5
7	WH/BR	7
8	BROWN	8
S		S

P2

ITEM	DESCRIPTION	QTY
8	LABEL + HEAT SHRINK TUBING	1
7	SR : PVC Moulding; COLOR : GREY .	1
6	RJ45 8P8C SHIELDED PLUG GOLD PLATED 50u".	1
5	GASKET	1
4	NUT	1
3	SR : PVC Moulding; COLOR : GREY .	1
2	RJ45 8P8C SHIELDED PLUG GOLD PLATED 50u".	1
1	CAT 6A 26AWG x 4P S/FTP CABLE.	1

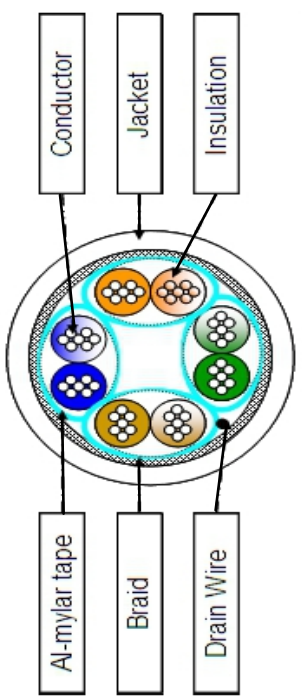

DRAW	Ku Chau	APPVL	KUNG	TITLE	RJ45 S/FTP PLUG/WATERPROOF SHIELDED CABLE ASS'Y/GREY	SHEET	1
CHECK	Emily Suen			PART NO.	RJ-08MM-XXM-GY-SS	VERSION	A
				DWG NO.	N-14191-1		

JKL TECHNOLOGY CO., LTD.