| REV. | DESCRIPTION | APPROVED BY | DATE | ECN NO. |
|---|---|---|---|---|
| A | RELEASE | KUNG | 22/01/21' | |
| B | | | | |
| C | | | | |

RoHS COMPLIANT

* SUBJECT TO CHANGE WITHOUT NOTICE

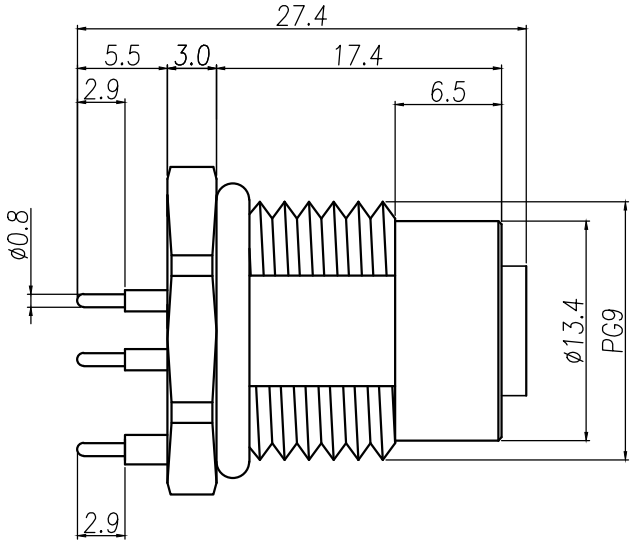


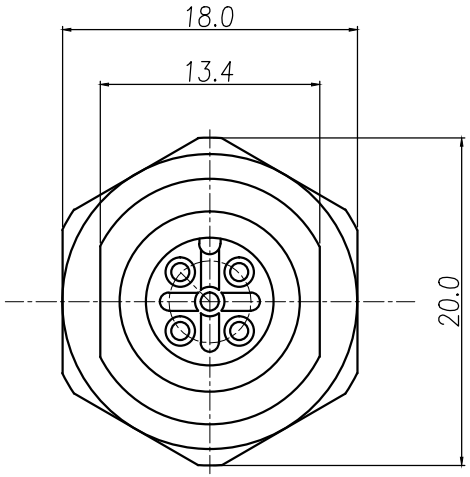


TABLE A

| | | |
|---|---|---|
| |  |  |
| WP-04F3-16-11 | WP-03F3-04-11 | WP-02F3-05-11 |
|  |  |  |
| WP-05F3-19-11 | WP-03F3-05-11 | WP-02F3-06-11 |

Pin Assignments
Front View

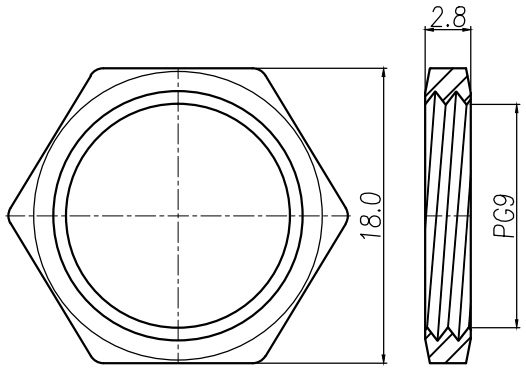


NUT

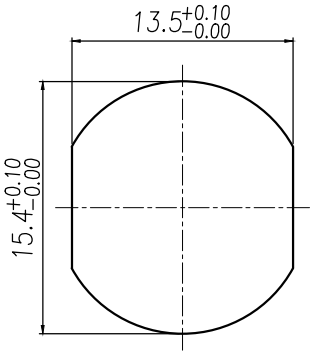


RECOMMENDPANEL CUT-OUT

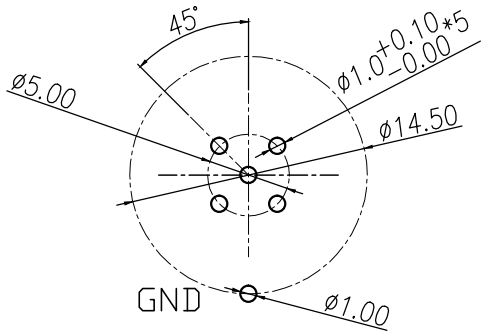


RECOMMEND P.C.B LAYOUT

1. MATERIAL :
   1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
   1-2. CONTACT : BRASS
   1-3. NUT : BRASS
   1-4. SHELL : BRASS
   1-5. O-RING : EPDM ; COLOR : BLACK
2. FINISH :
   2-1. CONTACT :10 MICRO INCHES MIN. GOLD PLATED UNDER PLATE : NICKEL
   2-2. NUT : NICKEL PLATED
   2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 4A
   3-2. Rated Voltage : 2~4PIN 250V ; 5PIN 60V
   3-3. Water proof : IP67
4. Environmental :
   4-1. Operation Temperature : -40℃~85℃

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| DRAWN | Ku Chou | APPEND | KUNG | UNIT | MM | TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1° | | JKL TECHNOLOGY CO., LTD. | TITLE | M12 4P (F) A CODE FRONT PANEL MOUNT , DIP TYPE ,WITH GROUND POST. | SHEET 1/1 |
| CHOKED | | | | SCALE | 1:1 | | | | PART NO. | WP-04F3-16-11 | DWG NO. QC10074 | VERSION A |